



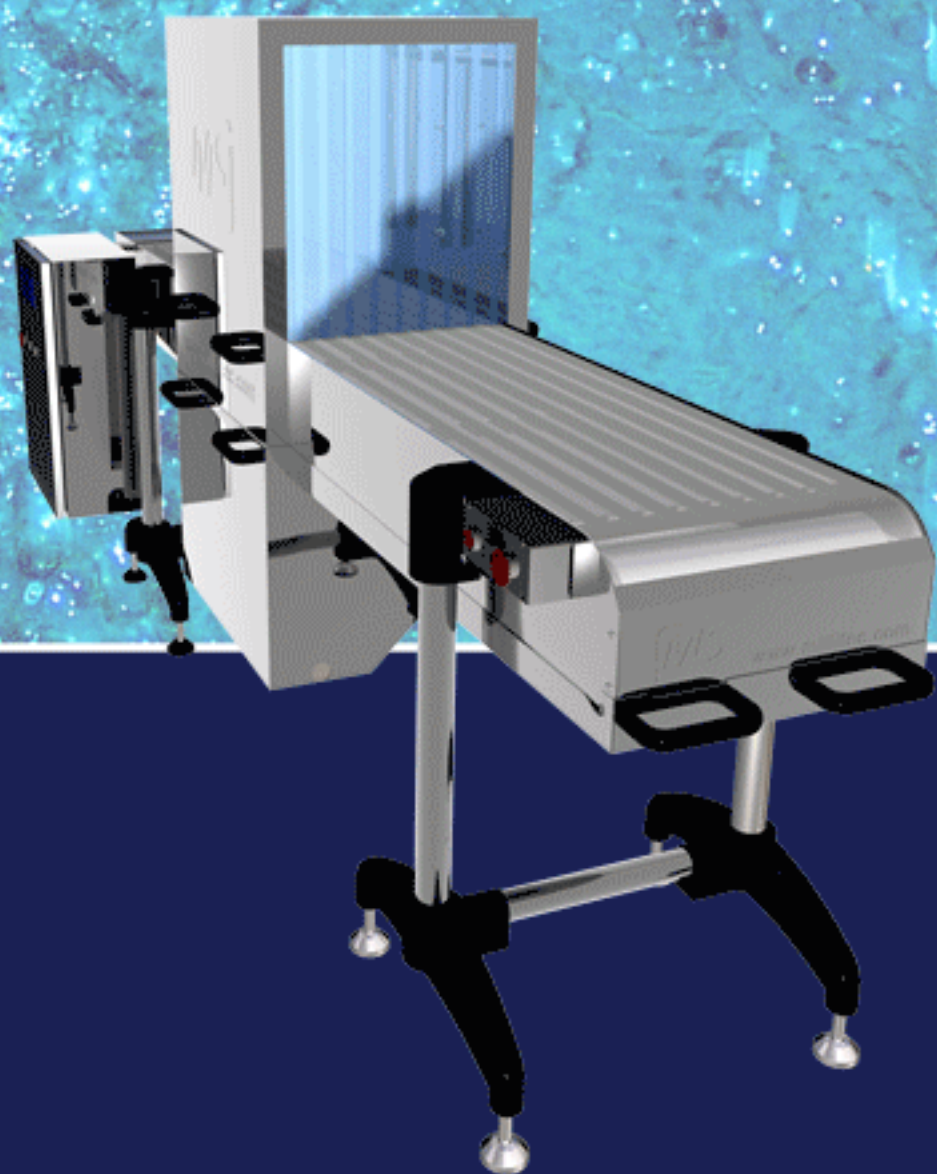

Millitec Food Systems

Innovation in Automation

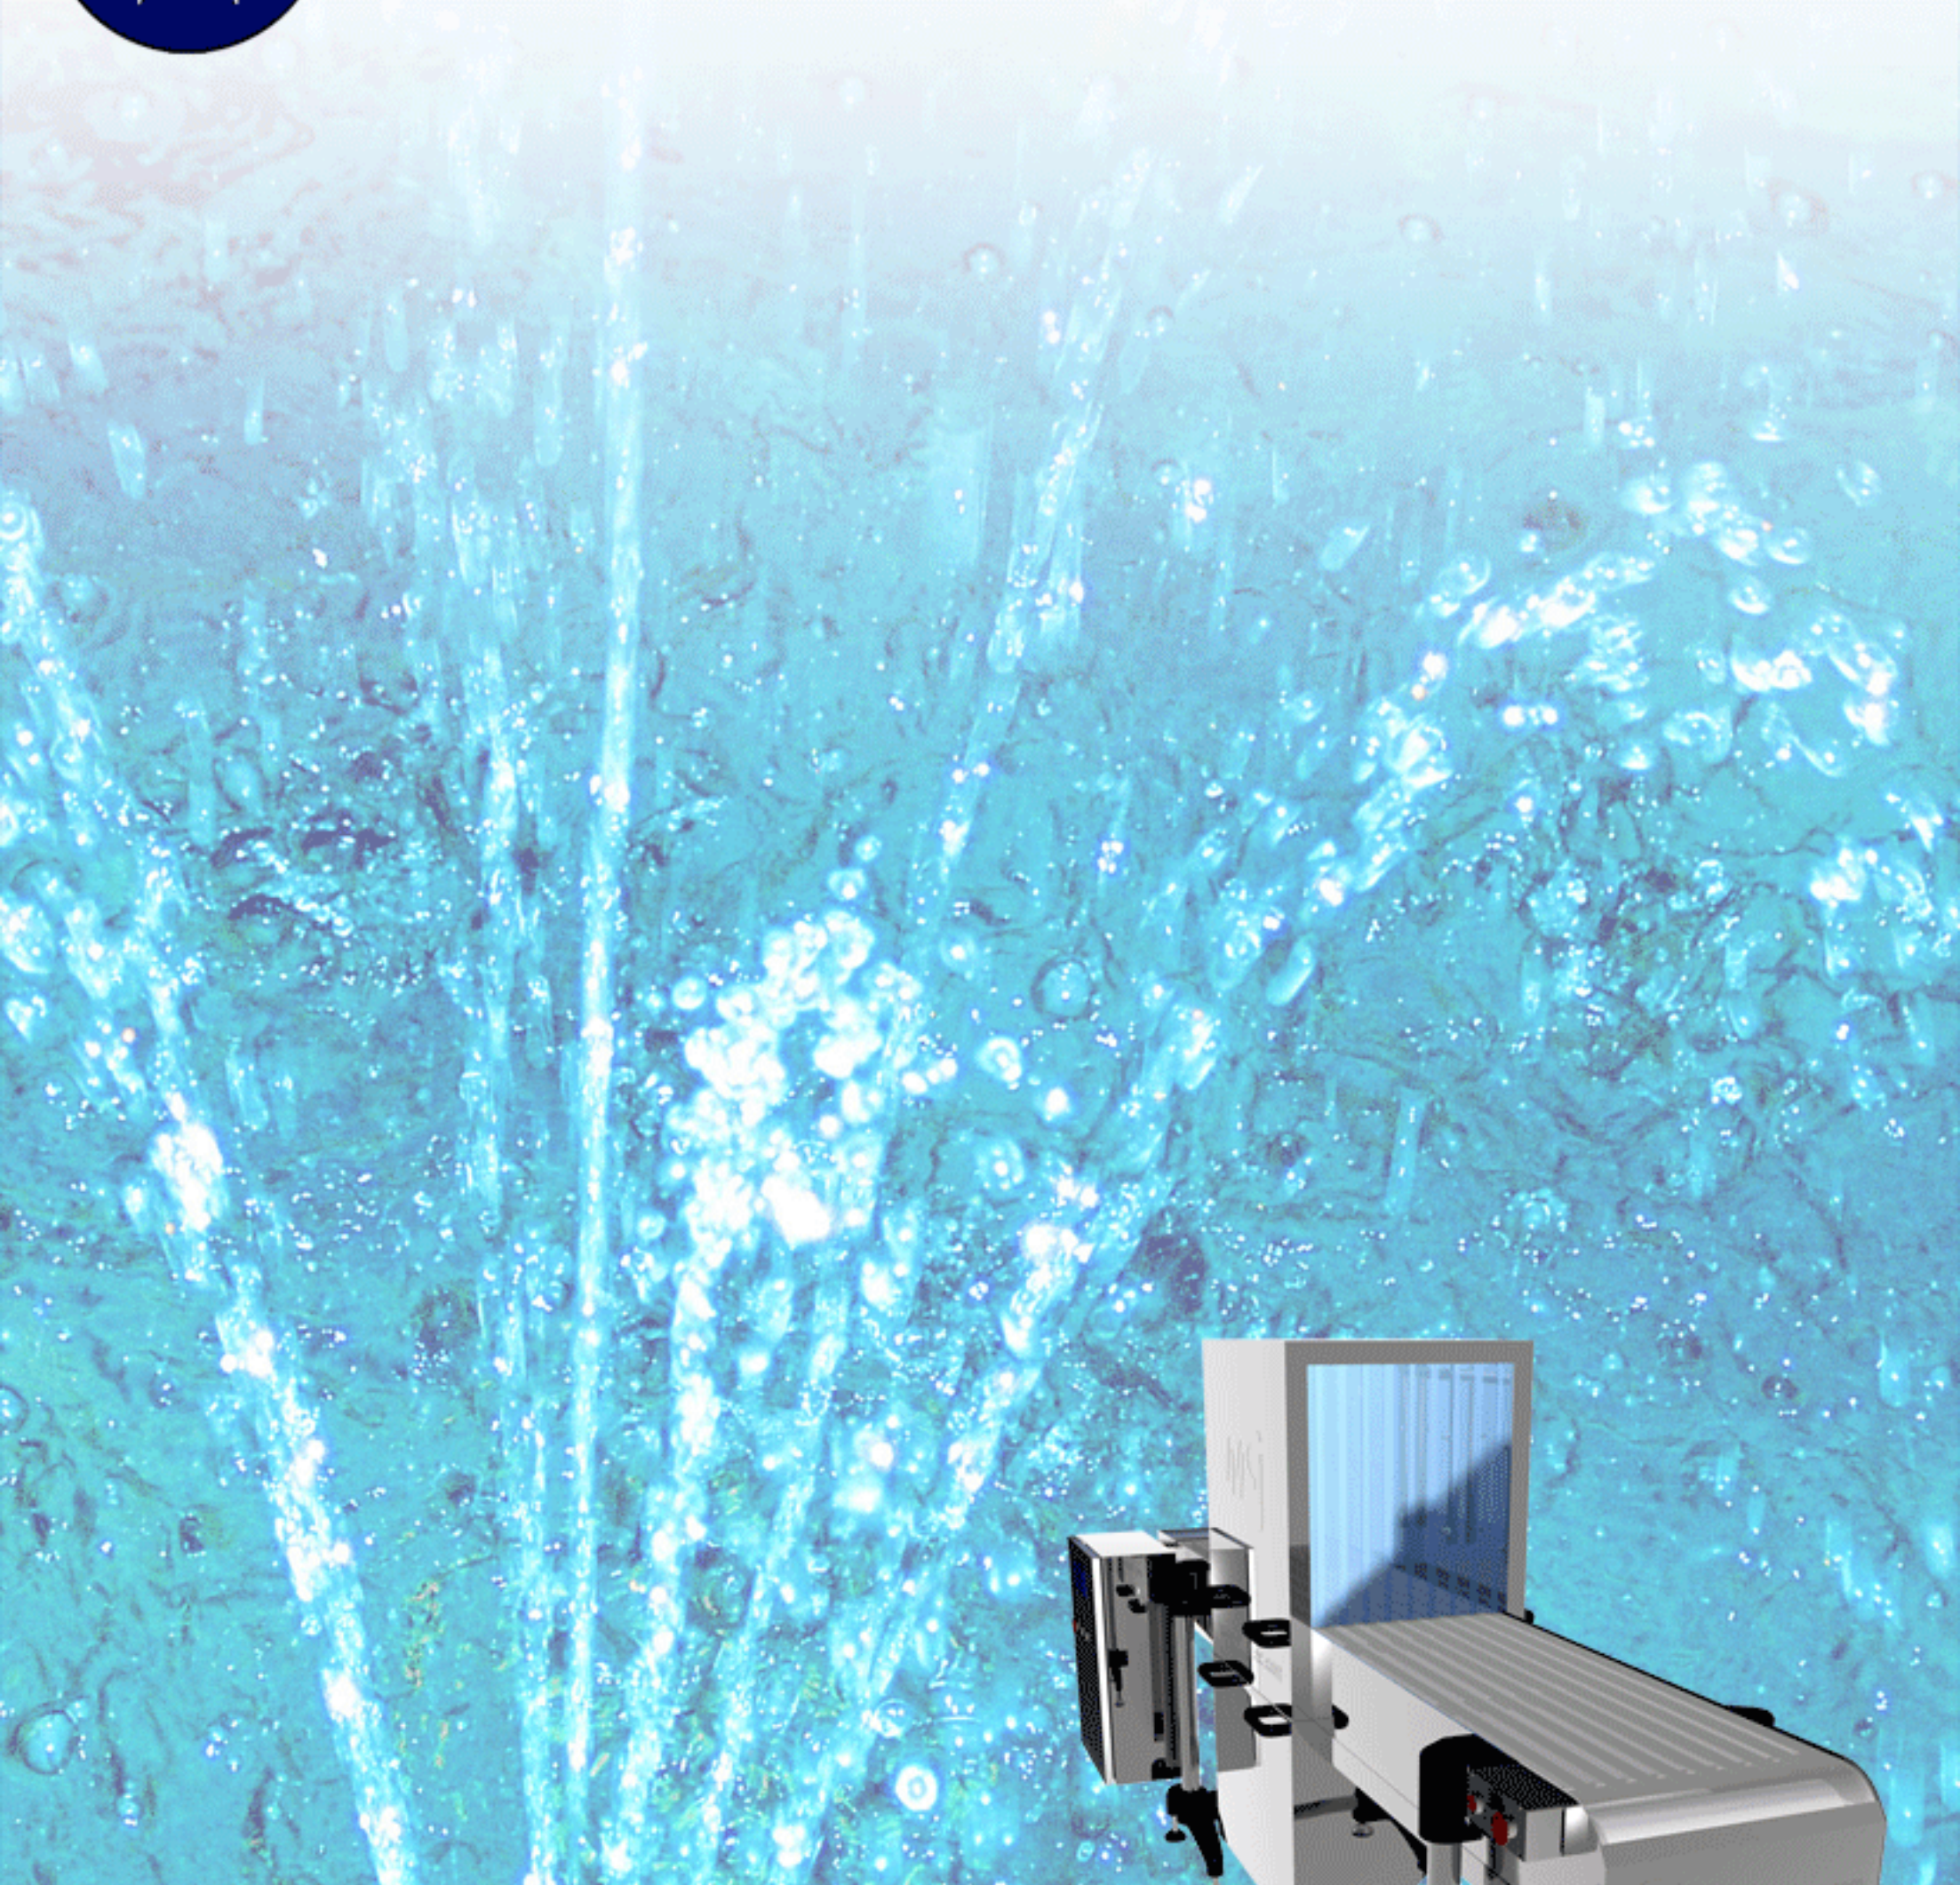

Sanitising Conveyor

cost effective hygiene procedure





Millitec Food Systems

Innovation in Automation

Sanitising Conveyor

cost effective hygiene procedure

Introduction

Millitec's SC-R Recirculating Sanitising Conveyor prevents contamination from any item entering a controlled environment. A comprehensive dosed water spray matrix - top, bottom, front and back - ensures that each product is fully sanitised before entering food or pharmaceutical production plants.

The SC-R uses a recirculating technique facilitating very low water consumption. This recirculation process allows water to be recycled continuously and refreshed when necessary.

The SC-R eliminates the risk of human error associated with dip tank, hand spray procedures and conventional sanitising tunnels. It gives the advantage of a sanitising tunnel with the low water consumption of a dip tank.

Increased spray pressure ensures penetration into all areas of packaging, even folds.



All machines are available for free trial or rental.

Contact

Millitec Food Systems Ltd
Unit 7
Woodhill Industrial Park
Old Dalby
Leicestershire
LE14 3LX

Features

- Water recirculating system
- Fully automatic recharge and drainage
- Covers removed within one minute for easy cleaning
- Controlled sanitising dosage
- Either sensor activation or continuous spray
- Fully enclosed 360° spray wash
- Open textured 400mm conveyor
- Automatic transfer to controlled area
- Removable covers and guards for easy cleaning
- Data logging for integrated plant management
- Extremely low water consumption
- Through wall mounting kit available
- Optional dosing system
- Can be networked to our production monitoring systems enabling: uploading of sanitising and product intake history and downloading of parameters.

Specifications

Dimensions

650mmx3000mm
Heights to suit conveyor belt
Aperture size: 405mmx475mm (wxh)

Controls

Stop, Start, Emergency stop.
Optional photo cell activation
Variable belt speed

Electronics

- Voltage: 200-220v AC - Current: 6A
- Frequency: 50-60Hz - Single Phase

Water Supply

$\frac{3}{4}$ BSP inlet
Optional dosing unit available
 $1\frac{1}{2}$ inch RJT connection to pneumatic drain valve

Millitec also manufacture:

- Cantilever conveyors for total hygiene
- Sanitisers
- Mixers and Tumblers
- Full range of sandwich lines
- Process control systems
- Palm top data acquisition
- Ultrasonic sandwich cutters
- CIP Systems

